

# Satellite Up- and Downconverter

Indoor / Outdoor

Single / Dual / Triple Band

Single / Dual Channel

S-, C-, X-, Ku-, K (DBS)-, Ka-, and Q-band



WORK Microwave's satellite up-and downconverters are designed to support the demanding requirements of analog and digital satellite transmissions, such as TV uplinks and high-speed data networks. Ideal use cases include fixed satellite ground stations as well as in satellite newsgathering (SNG) vehicles, fly-aways, other mobile or portable applications.

The fifth-generation frequency converter series is built with the most advanced technologies available to ensure outstanding performance, high reliability, and a longer lifetime.

## 5th-generation enhancements

**Reduced phase noise:** Based on a powerful new synthesizer the frequency converters achieve a phase noise significantly beyond the recommended industry specification (Intelsat's IESS-308/309).

**Improved flexibility and usability:** Through a new USB port, operators can now access the converter via the back panel to make copies of parameter settings, replicate selected configurations on another device, or save configuration settings for future reference. In addition, a user-friendly, Web-based interface offers an intuitive user experience. When coupled with the enhanced USB port, the customizable GUI also simplifies the installation of firmware updates.

**Higher reliability:** An AC power consumption of typically 35 VA / 23 W maximizes the reliability and lifetime of the units.

**Enhanced scalability:** A completely modular-based design provides users with a cost-effective solution that can be tailored according to specific needs, including frequency range, output power, and conversion gain.

## S-, C-, X-, Ku-, K-, Ka-, and Q-band coverage

The following satellite frequency bands are covered: S, C, X, Ku, K, Ka, and Q-band. The converters support the standard IF-frequency bands  $70 \pm 20$  MHz and/or  $140 \pm 40$  MHz. The conversion is performed without spectral inversion. The upconverters offer an increased power output ( $P_{1dB} \geq +10$  dBm) in all versions. The units are available as single band, dual band or as triple band converters. For more bands or channels please contact factory.

## High signal integrity

The extreme low phase noise of the oscillators guarantees an excellent signal quality. Low spurious emissions allow our customers to use the converters also in the environments with demanding requirements, such as high power video uplinks. Sophisticated temperature compensation guarantees the stability over a wide temperature range.

## Housing options


The converters normally are delivered without fans and can be operated in environments, where at minimum 1 RU space for natural ventilation is available above each unit. This eliminates the fan as potential point of failure. For rack installations without any space in between the units, a fan within the converter unit is recommended. This forces an airflow from the right side to left side of the units. Outdoor versions with IP67 degree of protection are also available.

## Operating and control – easy integration into your system

The converters can be operated via the push buttons on the front panel using intuitive display menus or via remote control (RS232, RS422/485 and TCP/IP over Ethernet). Detailed monitoring of the system status

and a summary alarm output (dual change over switch contacts) are provided. For the remote control either ASCII string-based commands as well as addressable, packet based commands are provided.

Remote monitoring and control through SNMP and a Web browser interface is also available.

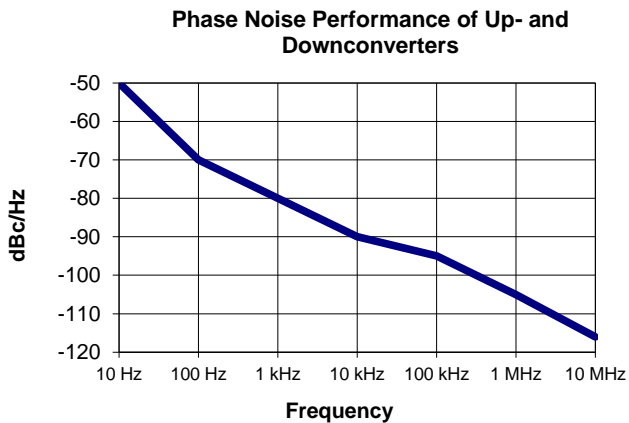

## Customized products

In addition to standard products WORK Microwave offers custom tailored products as follows:

- Modified or smaller housings to fit into your existing design for mobile and portable applications.
- Extended storage or operating temperature range.
- Military versions for hostile environment (shock, vibration, humidity).
- For down converters: Application specific output filtering and automatic level control. The output level is kept constant independent of the strength of the input signal with adjustable control.
- Additional PLO output.

## Key features

- 70 MHz or 140 MHz IF bands available
- Optional switchable IF 70 MHz and 140 MHz (IF 70/140)
- Very low phase noise (< -50 dBc/Hz @ 10 Hz)
- Long-term stability  $10^{-7}$  / year
- Output power +10 dBm (1 dB compression point)
- Automatic reference recognition (5 and 10 MHz)
- Adjustable gain equalizer
- Digital gain compensation

- Operating temperature range either -30 °C to 60 °C (-22 °F to 140 °F) or 0 °C to 50 °C (32 °F to 122 °F)
- Remote control through RS232, RS422/485 (2-wire or 4-wire) interfaces. Packet command syntax supports RS485 bus systems and allows addressed operation.
- Remote control through Ethernet supporting a TCP/IP command interface, a Web browser interface and SNMP (MIBs are provided).
- Test output on the front panel: RF-Test at up converter, IF-Test at down converter.
- Optional IF-Test output for up converters (Option: IFT)
- AC power switch on the front panel
- Summary alarm output (dual change over switch contacts)
- Transmit mute input
- Optional internal Fan (Option: FAN)
- CE compliant
- **3 years warranty**

## Order information

WORK Microwave offers two series of 19" rack mount satellite converters, Standard and High Performance. The specifications are the same for both types except the operating temperature range. The High Performance type operates between -30 °C to 60 °C (-22 °F to 140 °F) and the Standard type between 0 °C to 50 °C (32 °F to 122 °F). So if you only need units for inside use, the standard unit is perfectly suited for this application.

## Open questions, demo units

If you need more information about WORK Microwave's fifth-generation frequency converters or if you would like to have a demo unit, please contact us via e-mail: [sales@work-microwave.de](mailto:sales@work-microwave.de) or call us. We are glad to assist you.

# Satellite Upconverter

S-, C-, X-, Ku-, K- (DBS), Ka-band

Q-band available on request (contact factory)

Upconverter Type:	VHCU-S / VSCU-S	VHCU-S4 / VSCU-S4	VHCU-C / VSCU-C	VHCU-C1 / VSCU-C1
RF-Output Frequency:	S-Band 2.025 ... 2.290 GHz	S-Band 2.0 ... 2.6 GHz	C-Band 5.85 ... 6.65 GHz	C-Band 5.85 ... 7.03 GHz
Intermediate Frequency:	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	3050 MHz for 70 MHz IF Input 3040 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2610 MHz for 70 MHz IF Input 2600 MHz for 140 MHz IF Input
Phase Noise:	10 Hz -72 / -69 100 Hz -86 / -83 1 kHz -100 / -97 10 kHz -106 / -103 100 kHz -109 / -106 <sup>1)</sup> 1 MHz -112 / -109 <sup>1)</sup>	-70 / -67 -84 / -81 -98 / -95 -104 / -101 -107 / -104 <sup>1)</sup> -112 / -109 <sup>1)</sup>	-70 / -67 -85 / -82 -96 / -93 -103 / -100 -107 / -104 <sup>1)</sup> -112 / -109 <sup>1)</sup>	-70 / -67 -85 / -82 -96 / -93 -103 / -100 -107 / -104 <sup>1)</sup> -112 / -109 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator)	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm SMA female	3120 MHz (70 MHz IF) 3180 MHz (140 MHz IF) -6 ±3 dBm SMA female	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm SMA female	2680 MHz (70 MHz IF) 2740 MHz (140 MHz IF) -6 ±3 dBm SMA female
Test Output (indoor only, optional for outdoor): (Microwave Oscillator)	4.475 ... 4.740 GHz (70 MHz IF) 4.465 ... 4.730 GHz (140 MHz IF) -7 ±3 dBm SMA female	5.05 ... 5.65 GHz (70 MHz IF) 5.04 ... 5.64 GHz (140 MHz IF) -7 ±3 dBm SMA female	8.30 ... 9.10 GHz (70 MHz IF) 8.29 ... 9.09 GHz (140 MHz IF) -7 ±3 dBm SMA female	8.46 ... 9.64 GHz (70 MHz IF) 8.45 ... 9.63 GHz (140 MHz IF) -7 ±3 dBm SMA female

Upconverter Type:	VHCU-X / VSCU-X	VHCU-Ku / VSCU-Ku	VHCU-Ku1 / VSCU-Ku1	VHCU-K / VSCU-K
RF-Output Frequency:	X-Band 7.90 ... 8.40 GHz	Ku-Band 12.75 ... 14.50 GHz	Ku-Band 10.70 ... 12.75 GHz	K-Band 17.3 ... 18.4 GHz
Intermediate Frequency:	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input
Phase Noise:	10 Hz -63 / -60 100 Hz -83 / -80 1 kHz -93 / -90 10 kHz -98 / -95 100 kHz -100 / -97 <sup>1)</sup> 1 MHz -110 / -107 <sup>1)</sup>	-63 / -60 -83 / -80 -93 / -90 -98 / -95 -100 / -97 <sup>1)</sup> -110 / -107 <sup>1)</sup>	-63 / -60 -83 / -80 -93 / -90 -98 / -95 -100 / -97 <sup>1)</sup> -110 / -107 <sup>1)</sup>	-63 / -60 -83 / -80 -93 / -90 -98 / -95 -100 / -97 <sup>1)</sup> -110 / -107 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator)	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm SMA female	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm SMA female	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female
Test Output (indoor only, optional for outdoor): (Microwave Oscillator)	10.35 ... 10.85 GHz (70 MHz IF) 10.34 ... 10.84 GHz (140 MHz IF) -7 ±3 dBm SMA female	15.20 ... 16.95 GHz (70 MHz IF) 15.19 ... 16.94 GHz (140 MHz IF) -7 ±3 dBm SMA female	13.15 ... 15.2 GHz (70 MHz IF) 13.14 ... 15.19 GHz (140 MHz IF) -7 ±3 dBm SMA female	14.85 ... 15.95 GHz (70 MHz IF) 15.86 ... 15.96 GHz (140 MHz IF) -7 ±3 dBm SMA female

Upconverter Type:	VHCU-Ka / VSCU-Ka	VHCU-Ka1 / VSCU-Ka1	VHCU-Ka2 / VSCU-Ka2	VHCU-Ka3 / VSCU-Ka3
RF-Output Frequency:	Ka-Band 27.5 ... 31 GHz	Ka-Band 19.2 ... 20.2 GHz	Ka-Band 17.7 ... 19.5 GHz	Ka-Band 19.4 ... 21.2 GHz
Intermediate Frequency:	5170 MHz for 70 MHz IF Input 5100 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input
Phase Noise:	10 Hz -56 / -53 100 Hz -73 / -70 1 kHz -84 / -81 10 kHz -90 / -87 100 kHz -93 / -90 <sup>1)</sup> 1 MHz -103 / -100 <sup>1)</sup>	-61 / -58 -81 / -78 -91 / -88 -96 / -93 -98 / -95 <sup>1)</sup> -108 / -105 <sup>1)</sup>	-61 / -58 -81 / -78 -91 / -88 -96 / -93 -98 / -95 <sup>1)</sup> -108 / -105 <sup>1)</sup>	-61 / -58 -81 / -78 -91 / -88 -96 / -93 -98 / -95 <sup>1)</sup> -108 / -105 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator)	5240 MHz (70 MHz IF) 5240 MHz (140 MHz IF) -6 ±3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female
Test Output (indoor only, optional for outdoor): (Microwave Oscillator)	16.335 ... 18.085 GHz (70 MHz IF) 16.335 ... 18.085 GHz (140 MHz IF) -10 ±3 dBm SMA female	16.75 ... 17.75 GHz (70 MHz IF) 16.76 ... 17.76 GHz (140 MHz IF) -7 ±3 dBm SMA female	15.25 ... 17.05 GHz (70 MHz IF) 15.26 ... 17.06 GHz (140 MHz IF) -7 ±3 dBm SMA female	16.95 ... 18.75 GHz (70 MHz IF) 16.96 ... 18.76 GHz (140 MHz IF) -7 ±3 dBm SMA female

Specifications continued next page

# Satellite Upconverter

S-, C-, X-, Ku-, K- (DBS), Ka-band  
 Q-band available on request (contact factory)

<b>Conversion Scheme:</b>	Dual up conversion, no frequency inversion
<b>Frequency Resolution:</b>	100 Hz
<b>IF-Input Characteristics:</b>	Frequency: 70 ±20 MHz or 140 ±40 MHz (optional: both → [IF-Band] = 70/140) Impedance: 50 or 75 Ω Return loss: > 20 dB Operational input level: -40 dBm <sup>1)</sup> Maximum aggregate input level: +10 dBm (damage level) IF-Connectors: BNC female N female (standard with option OD)
<b>RF-Output Characteristics:</b>	Impedance: 50 Ω Return loss: > 20 dB 1 dB compression point: > 10 dBm Output muting: > 60 dB (by command or sense input or by alarm condition) RF-signal monitor: -20 dB of RF-output (approx.) (indoor only, optional for outdoor) RF-connectors: SMA female (standard) K female (-Ka standard) WR28 waveguide (-Ka with option WR28)
<b>Transfer Characteristics:</b>	Max. conversion gain: 40 dB ±1.0 dB Attenuation range: 0 ... 30 dB, Step 0.1 dB Level stability: ±0.25 dB/day at constant temperature ±0.5 dB max., ±0.2 dB typ. over temperature range Gain flatness: ±0.25dB over ±20 MHz (IF 70 MHz), ±0.40 dB over ±40 MHz (IF 140 MHz) Image rejection: > 80 dB Noise figure: < 12 dB <sup>1)</sup>
<b>Equalizer (Gain Slope):</b>	max ± 0.0625 dB / MHz (IF 70 MHz), adjustable max ± 0.05 dB / MHz (IF 140 MHz), adjustable
<b>Group Delay (±18 MHz):</b>	Linear: 0.03 ns / MHz max. Parabolic: 0.01 ns / MHz <sup>2</sup> max. Ripple: 1 ns peak to peak max.
<b>Group Delay (±36 MHz):</b>	Linear: 0.015 ns / MHz max. Parabolic: 0.005 ns / MHz <sup>2</sup> max. Ripple: 2 ns peak to peak max.
<b>Intermodulation (3<sup>rd</sup> Order):</b>	OIP3: >18 dBm <sup>1)</sup>
<b>AM / PM conversion:</b>	0.1° / dB <sup>1)</sup>
<b>Spurious Outputs:</b>	Signal related: < -60 dBc (Δf < 2 MHz), < -70 dBc (Δf ≥ 2 MHz) <sup>1)2)</sup> Output harmonics: < -40 dBc <sup>1)2)</sup> Signal independent: < -70 dBm
<b>Frequency Stability:</b>	±1 x 10 <sup>-7</sup> , -30 °C ... 60 °C ±1 x 10 <sup>-8</sup> , -30 °C ... 60 °C (after 30 min warm up) ±1 x 10 <sup>-9</sup> per day (fixed temperature after 24 h warm up)

<sup>1)</sup> at max. conversion gain  
<sup>2)</sup> Pout = 0 dBm

Specifications are subject to change

These converter types are only a small selection of what is available. Please contact us for further frequency bands and features.

# Satellite Downconverter

S-, C-, X-, Ku-, K- (DBS), Ka-band  
 Q-band available on request (contact factory)

Downconverter Type:	VHCD-S / VSCD-S	VHCD-S4 / VSCD-S4	VHCD-C / VSCD-C	VHCD-C1 / VSCD-C1
RF-Input Frequency:	S-Band 2.025 ... 2.290 GHz	S-Band 2.0 ... 2.6 GHz	C-Band 3.4 ... 4.2 GHz	C-Band 3.4 ... 4.8 GHz
Intermediate Frequency:	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output	3050 MHz for 70 MHz IF Output 3040 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-72 / -69 -86 / -83 -100 / -97 -106 / -103 -109 / -106 <sup>1)</sup> -112 / -109 <sup>1)</sup>	-70 / -67 -84 / -81 -98 / -95 -104 / -101 -107 / -104 <sup>1)</sup> -112 / -109 <sup>1)</sup>	-70 / -67 -84 / -81 -98 / -95 -104 / -101 -107 / -104 <sup>1)</sup> -112 / -109 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator):	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female	3120 MHz (70 MHz IF) 3180 MHz (140 MHz IF) -6 ±3 dBm SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female
Test Output (indoor only, optional for outdoor): (Microwave Oscillator):	4.475 ... 4.740 GHz (70 MHz IF) 4.465 ... 4.730 GHz (140 MHz IF) -7 ±3 dBm SMA female	5.05 ... 5.65 GHz (70 MHz IF) 5.04 ... 5.64 GHz (140 MHz IF) -7 ±3 dBm SMA female	5.55 ... 6.35 GHz (70 MHz IF) 5.54 ... 6.34 GHz (140 MHz IF) -7 ±3 dBm SMA female	5.55 ... 6.95 GHz (70 MHz IF) 5.54 ... 6.94 GHz (140 MHz IF) -7 ±3 dBm SMA female

Downconverter Type:	VHCD-X / VSCD-X	VHCD-Ku / VSCD-Ku	VHCD-Ka / VSCD-Ka	VHCD-Ka2 / VSCD-Ka2
RF-Input Frequency:	X-Band 7.25 ... 7.75 GHz	Ku-Band 10.70 ... 12.75 GHz	Ka-Band 18.1 ... 21.2 GHz	Ka-Band 17.7 ... 19.5 GHz
Intermediate Frequency:	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-70 / -67 -86 / -83 -96 / -93 -103 / -100 -108 / 105 <sup>1)</sup> -112 / 109 <sup>1)</sup>	-63 / -60 -83 / -80 -93 / -90 -98 / -95 -100 / -97 <sup>1)</sup> -110 / -107 <sup>1)</sup>	-60 / -57 -80 / -77 -90 / -87 -95 / -92 -97 / -94 <sup>1)</sup> -107 / -104 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator)	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm, Connector SMA female
Test Output (indoor only, optional for outdoor): (Microwave Oscillator)	9.40 ... 9.90 GHz (70 MHz IF) 9.39 ... 9.89 GHz (140 MHz IF) -7 ±3 dBm SMA female	12.85 ... 14.90 GHz (70 MHz IF) 12.84 ... 14.89 GHz (140 MHz IF) -7 ±3 dBm SMA female	15.65 ... 18.75 GHz (70 MHz IF) 15.66 ... 18.76 GHz (140 MHz IF) -7 ±3 dBm SMA female	15.25 ... 17.05 GHz (70 MHz IF) 15.26 ... 17.06 GHz (140 MHz IF) -7 ±3 dBm SMA female

Downconverter Type:	VHCD-Ka3 / VSCD-Ka3	VHCD-Ka4 / VSCD-Ka4	VHCD-Ka7 / VSCD-Ka7	
RF-Input Frequency:	Ka-Band 19.4 ... 21.2 GHz	Ka-Band 27.5 ... 31 GHz	Ka-Band 25.5 ... 27.5 GHz	
Intermediate Frequency:	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output	5170 MHz for 70 MHz IF Output 5100 MHz for 140 MHz IF Output	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output	
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-60 / -57 -80 / -77 -90 / -87 -95 / -92 -97 / -94 <sup>1)</sup> -107 / -104 <sup>1)</sup>	-54 / -51 -74 / -71 -83 / -80 -89 / -86 -91 / -88 <sup>1)</sup> -101 / -98 <sup>1)</sup>	-57 / -54 -77 / -74 -87 / -84 -92 / -89 -94 / -91 <sup>1)</sup> -104 / -101 <sup>1)</sup>
typ. / max. values in dBc/ Hz <sup>1)</sup> 0 °C ... 50 °C, outside this temperature range degraded by max 5 dB.				
Test Output (indoor only, optional for outdoor): (Fixed Oscillator)	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female	5240 MHz -6 ±3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140 MHz IF) -6 ±3 dBm SMA female	
Test Output (indoor only, optional for outdoor): (Microwave Oscillator)	16.95 ... 18.75 GHz (70 MHz IF) 16.96 ... 18.76 GHz (140 MHz IF) -7 ±3 dBm SMA female	16.335 ... 18.085 GHz (70 MHz IF) 16.30 ... 18.05 GHz (140 MHz IF) -7 ±3 dBm SMA female	11.525 ... 12.525 GHz (70 MHz IF) 11.53 ... 12.53 GHz (140 MHz IF) -7 ±3 dBm SMA female	

Specifications continued next page

# Satellite Downconverter

## S-, C-, X-, Ku-, K- (DBS), Ka-band

### Q-band available on request (contact factory)

<b>Conversion Scheme:</b>	Dual down-conversion, no frequency inversion
<b>Frequency Resolution:</b>	100 Hz
<b>RF-Input Characteristics:</b>	Impedance: 50 Ω Return loss: > 20 dB Operational input level: -45 dBm <sup>1)</sup> Maximum aggregate input level: +5 dBm (damage level) LO leakage: < -80 dBm RF-connector: SMA female (standard) K female (-Ka standard) WR28 waveguide (-Ka with option WR28)
<b>IF-Output Characteristics:</b>	Frequency: 70 ± 20 MHz or 140 ± 40 MHz (optional: both → [IF-Band] = 70/140) Impedance: 50 or 75 Ω Return loss: > 20 dB 1 dB compression point: > 10 dBm, 13 dBm typical Output muting: > 60 dB (by command or sense input or by alarm condition) IF-signal monitor: -20 dB of IF-output (approx.) IF-connectors: BNC female N female (standard with option OD)
<b>Transfer Characteristics:</b>	Max. conversion gain: 45 dB ± 1.0 dB Attenuation range: 0 ... 30 dB, Step 0.1 dB Level stability: ±0.25 dB/day at constant temperature ±0.5 dB max., ±0.2 dB typ. over temperature range Gain flatness: ±0.25 dB over ±20 MHz (IF 70 MHz), ±0.40 dB over ±40 MHz (IF 140 MHz) Image rejection: > 80 dB Noise figure: < 12 dB <sup>1)</sup>
<b>Equalizer (Gain slope):</b>	max ± 0.0625 dB / MHz (IF 70 MHz), max ± 0.05 dB / MHz (IF 140 MHz) (programmable)
<b>Group Delay (±18 MHz):</b>	Linear: 0.03 ns / MHz max. Parabolic: 0.01 ns / MHz <sup>2</sup> max. Ripple: 1 ns peak to peak max.
<b>Group Delay (±36 MHz):</b>	Linear: 0.015 ns / MHz max. Parabolic: 0.005 ns / MHz <sup>2</sup> max. Ripple: 2 ns peak to peak max.
<b>Intermodulation (3<sup>rd</sup> Order):</b>	OIP3: > 20 dBm <sup>1)</sup>
<b>AM / PM conversion:</b>	0.1° / dB <sup>1)</sup>
<b>Spurious Outputs:</b>	Signal related: < -60 dBc (Δf < 2 MHz), < -70 dBc (Δf ≥ 2 MHz) <sup>1)2)</sup> Output harmonics: < -40 dBc <sup>1)2)</sup> Signal independent: < -75 dBm
<b>Frequency Stability:</b>	±1 × 10 <sup>-7</sup> , -30 °C ... 60 °C ±1 × 10 <sup>-8</sup> , -30 °C ... 60 °C (after 30 min warm up) ±1 × 10 <sup>-9</sup> per day (fixed temperature after 24 h warm up)

<sup>1)</sup> at max. conversion gain

<sup>2)</sup> P<sub>out</sub> = 0 dBm

Specifications are subject to change

These converter types are only a small selection of what is available. Please contact us for further frequency bands and features.

# Satellite Up- and Downconverter

Indoor / Outdoor

S-, C-, X-, Ku-, K- (DBS), Ka-band

Q-band available on request (contact factory)

## Indoor Housing:

<b>Reference Input</b>	Frequency: 5 or 10 MHz sine wave Level: 5 dBm ±5 dB Modes: auto/extern/intern Connector: BNC female
<b>Reference Output</b>	Frequency: 10 MHz Level: 0 dBm ±3 dB Connector: BNC female
<b>Monitoring and Control Interface:</b>	Protocol: SNMP Connection: UDP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
	Protocol: HTTP (web browser interface) Connection: TCP/IP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
	Protocol: Multipoint Connection: RS232 or RS422/RS485 (configurable), connector DSUB09 female or TCP/IP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
<b>Alarm Interface:</b> <b>Mute Input:</b>	Alarm: two potential free contacts (DPDT), Mute Input: TTL logic input with internal pull up Connector DSUB09 female
<b>Temperature Range:</b>	Standard performance: 0 °C ... 50 °C operating, -30 °C ... 80 °C storage High performance: -30 °C ... 60 °C operating (10 minutes warm up at -30 °C)
<b>Relative Humidity:</b>	< 95 % non condensing
<b>User Interface: (Indoor only)</b>	LCD-Display 2 x 40 characters, 4 cursor keys, 4 function keys VFD-Display 2 x 40 characters, 4 cursor keys, 4 function keys (with option VFD)
<b>Mains Power Input:</b>	100 ... 240 V AC nominal, 90 ... 264 V AC max., 50 ... 60 Hz
<b>Mains Power Consumption:</b>	Max.: 45 VA / 30 W (single converters) Typ.: 35 VA / 23 W (single converters)
<b>Mains Power Input Connector:</b>	Indoor: IEC C14
<b>Mains Fuse:</b>	2 x 2.0 A, time-lag fuse
<b>Dimension and Weight:</b>	Indoor: 483 x 44 x 505 mm <sup>3</sup> (WxHxD), 1 RU (19") approx. 8.4 kg

## Outdoor Housing:

<b>Reference Input (Option):</b>	Frequency: 5 or 10 MHz sine wave Level: 5 dBm ±5 dB Modes: auto/extern/intern Connector: SMA female
<b>Reference Output (Option):</b>	Frequency: 10 MHz Level: 0 dBm ±3 dB Connector: SMA female
<b>Combined Monitoring and Control Interface and Alarm Interface:</b>	Protocol: Multipoint packet format commands Connection: RS232 or RS422/RS485 (configurable), connector MIL-C-26482: MS 3120 E 14-19-S
	Alarm output: Two potential free contacts (DPDT) 24 V DC output: max. 0.3 A 6.5 V DC output: max. 0.2 A
	Connection type: MIL-C-26482: MS 3120 E 14-19-S
	Mute Input: TTL logic input with internal pull up
<b>Monitoring and Control Interface:</b>	Protocol: SNMP Connection: UDP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
	Protocol: HTTP (web browser interface) Connection: TCP/IP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
	Protocol: Multipoint packet format commands Connection: TCP/IP over Ethernet (10 or 100 Mbps, auto sensing), connector RJ-45
<b>Temperature Range:</b>	-30 °C ... 60 °C operating (10 minutes warmup at -30 °C)
<b>Relative Humidity:</b>	< 100 %
<b>Mains Power Input:</b>	100 ... 240 V AC nominal, 90 ... 264 V AC max., 50 ... 60 Hz
<b>Mains Power Consumption:</b>	Max.: 45 VA / 30 W (single converters) Typ.: 35 VA / 23 W (single converters)
<b>Mains Power Input Connector:</b>	Amphenol C16-1 (3+PE) male
<b>Mains Fuse:</b>	2 x 2 A time-lag fuse
<b>Dimensions:</b>	322 x 108 x 391 mm <sup>3</sup> (WxHxD) (small housing) (standard) 402 x 111 x 391 mm <sup>3</sup> (WxHxD) (large housing) 412 x 108 x 515 mm <sup>3</sup> (WxHxD) (XL housing)
<b>Degree of Protection:</b>	IP 67 (acc. IEC 529)

Specifications are subject to change